COB030	—	24	—	8	—	30	—	33	—	90	—	
Model		Voltage		Width		CCT		IP		CRI		Length
		24: 24V		8: 8mm		30: 3000K		33: IP33		90: 90+		5m (SD) Customized

c UL us LISTED E509236



CCT	Power	Brightness	Luminous Efficacy
3000K	3 W/ft	314 lm/ft	104.67 lm/W

Project	
Qty	
Date	
Client	

** Please Contact us for NS - special order CCT.*

Standard CCT


3000K


Waterproof Solution

IP33

SMD	SMD2835 white
Input Voltage	24VDC
Beam Angle	180°
CRI	90+
Power	10W/M (3W/ft.)
Current	0.4A/M(0.13A/FT)
Brightness	314lm/ft (3000K)
Length/Reel	5m(16.4ft)
Cut Length	50mm/unit (0.16ft/unit)
Max. Length (No Voltage drop)	5m (16.4ft)
IP Grade	IP33
Operating Temperature	-20°C~45°C
LED CCT & Wavelength	2700K* / 3000K / 4000K* *(* Please Contact us for NS - special order CCT.)*
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V,Triac, DALI, DMX, WIFI etc.)
Certification	UL, CE, RoHS

DIMENSION

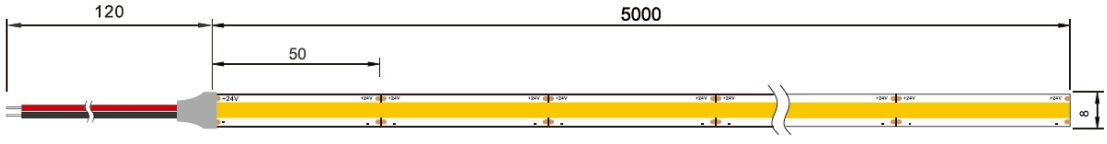



c UL us LISTED E509236 CE RoHS REACH

Parameters above allow 10% floating