JOYOLIGHt


LS580D

INSTALLATION GUIDE

2019-09

SUSPENSION SYSTEM

READ CAREFULLY
BEFORE INSTALLATION

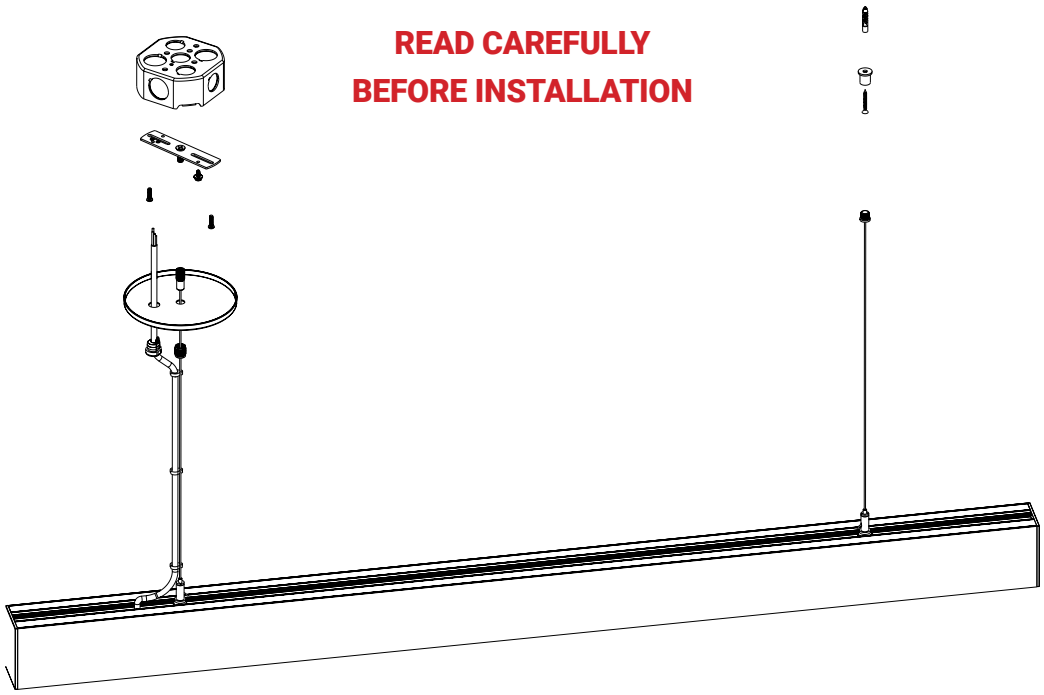

#12, 5200 Dixie Rd,
Mississauga, ON
Canada L4W 1E4
www.joyolight.ca
sales@joyolight.com

⚠ WARNING

Failure to comply with the following installation instructions may result in death or serious injury.

- This product must be installed and serviced by a qualified electrician.
- Separate the power supply wiring (110V) and dimming/control wiring
- Disconnect power before installing to avoid electrical shock
- Do not exceed fixture specified voltage
- Power cable should not support the weight of the fixture and stay loose
- Do not use fixture, parts or connectors which are damaged

⚠ CAUTION


- Should a production received with missing or damaged parts, please contact Joyolight at 1-877-849-1942.
- Should a fixture not work properly, please turn fixture off and contact Joyolight technical support for immediate assistance.
- Handle the fixture with care throughout the installation in case of damaging the fixture.
- Always wear clean latex or cotton gloves to avoid spots or fingerprint marks on the fixture.
- Unauthorized field repairs will void warranty

JOYOLIGHT GROUP INC.


#12, 5200 Dixie road
Mississauga, ON, L4W 1E4

www.joyolight.ca
sales@joyolight.com
1-877-849-1942
647-496-8107


SUSPENSION SYSTEM OVERVIEW

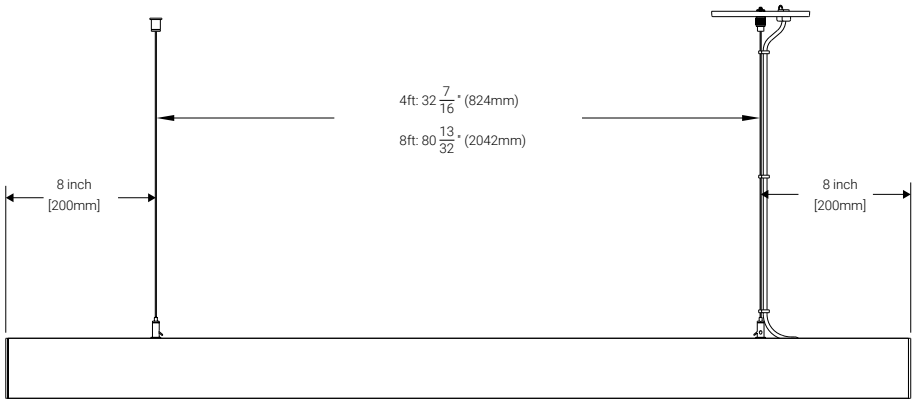

Front View

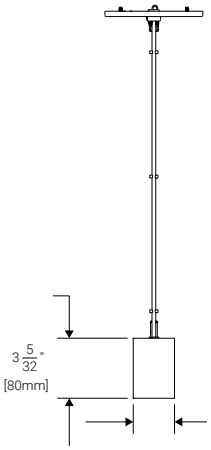

Side View

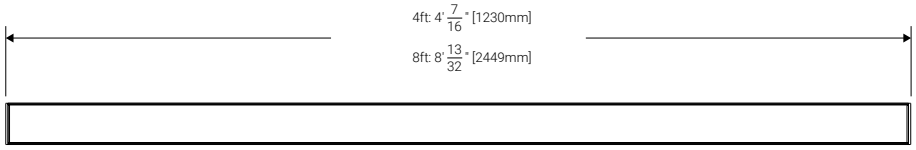


Top View

Accessories



PW-NS-01

Pendant wire,
Non-power side
with screws,
70 inches



PW-PS-01

Pendant wire,
Power side
with screws,
canopy 70 inches


JOYOLIGHT GROUP INC.

#12, 5200 Dixie road
Mississauga, ON, L4W 1E4

www.joyolight.ca
sales@joyolight.com
1-877-849-1942
647-496-8107

Intallation Instructions


Step 1: Install the Canopy and Power Cable

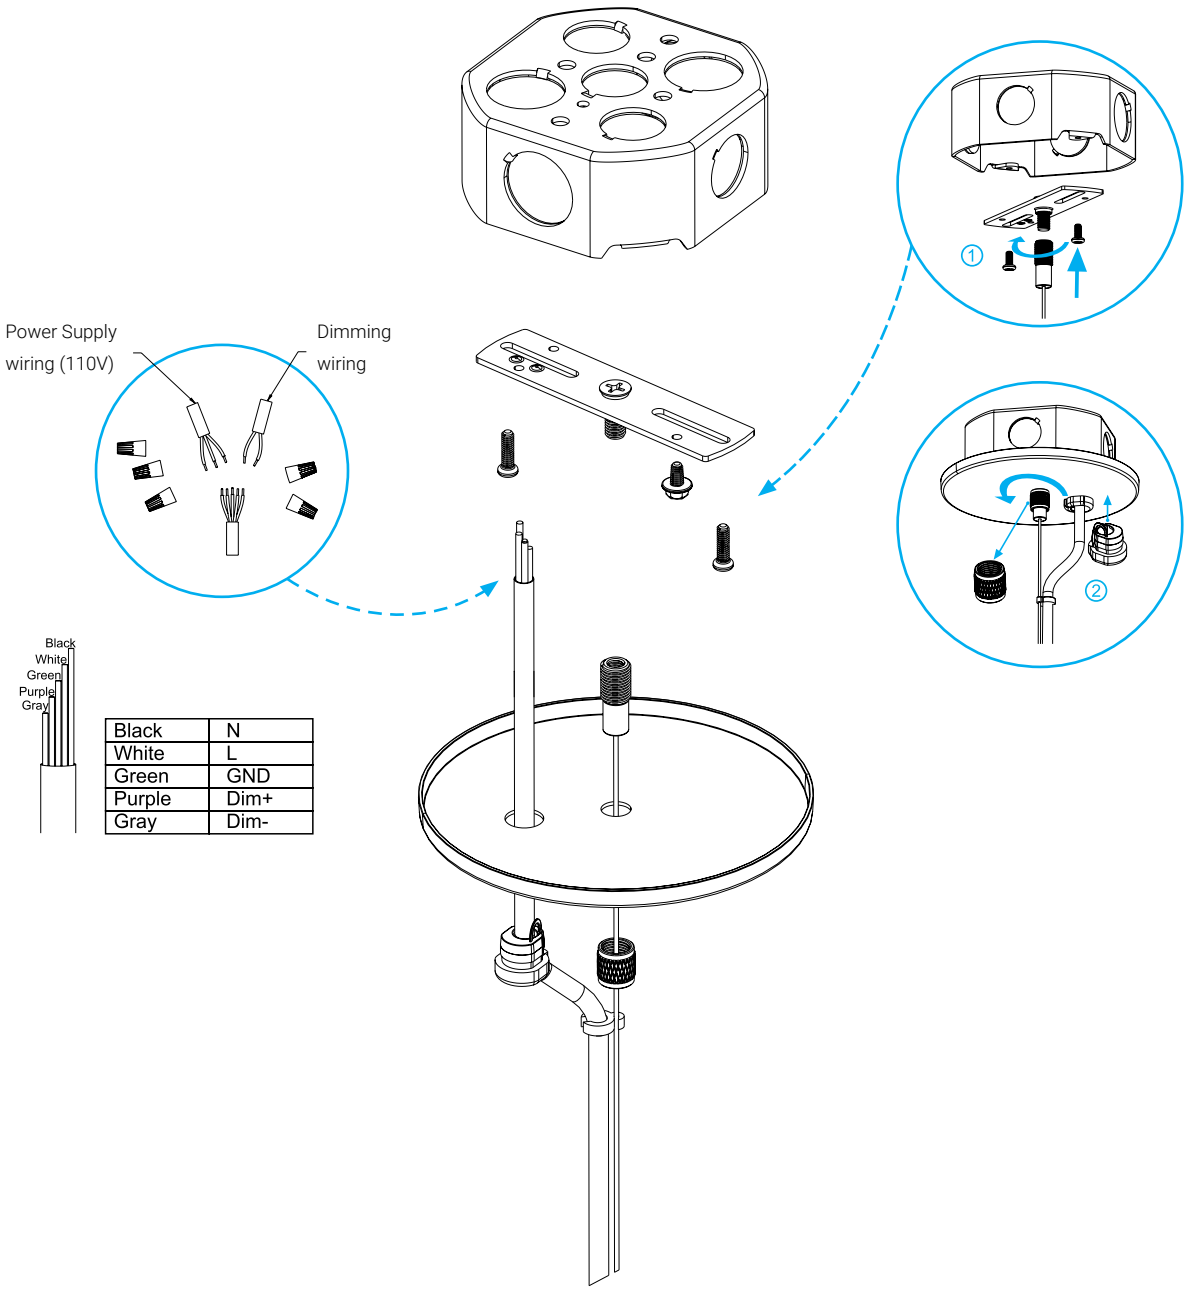


Black	N
White	L
Green	GND
Purple	Dim+
Gray	Dim-


Step 2: Install the Suspension Components

[Drill bit diameter: $\frac{15}{64}$" (6mm)]

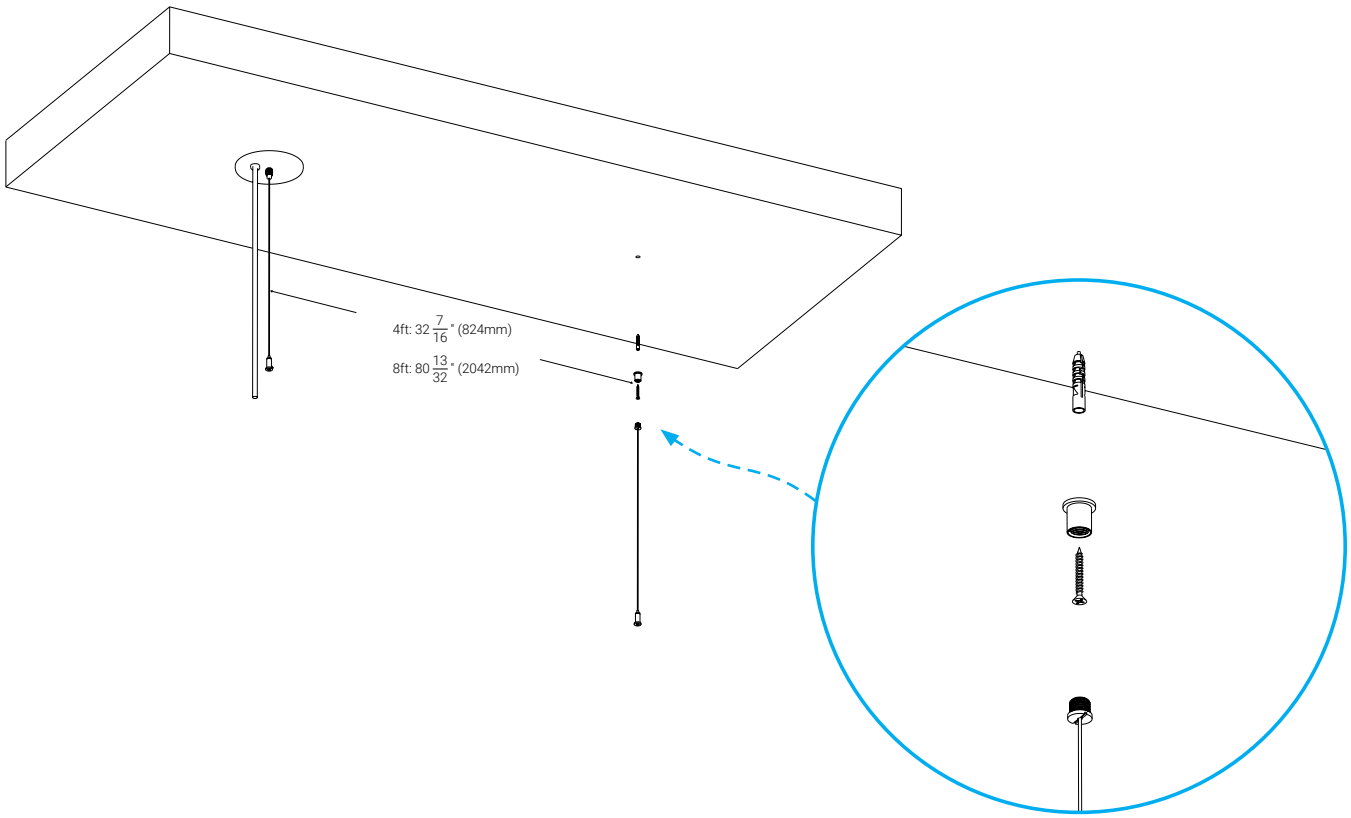


Step 3: Install the fixture

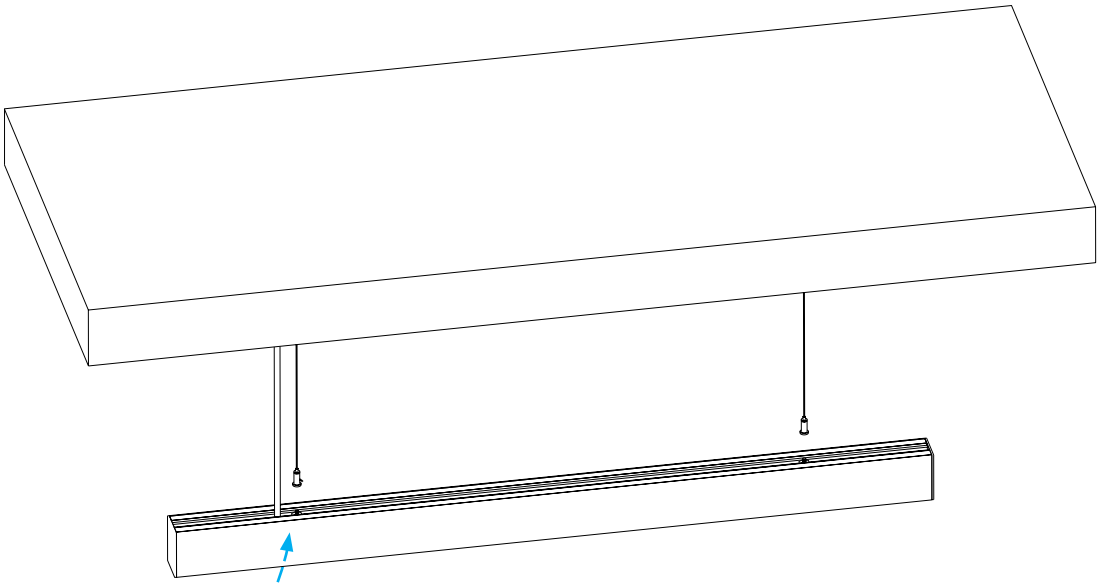




Screws can be adjusted horizontally

Tighten the screw and fix the position of the screw.



Hold down the upper little cylinder and adjust the steel cable.




JOYOLIGHT GROUP INC.

#12, 5200 Dixie road
Mississauga, ON, L4W 1E4

www.joyolight.ca
sales@joyolight.com
1-877-849-1942
647-496-8107

Step 4: Complete the installation

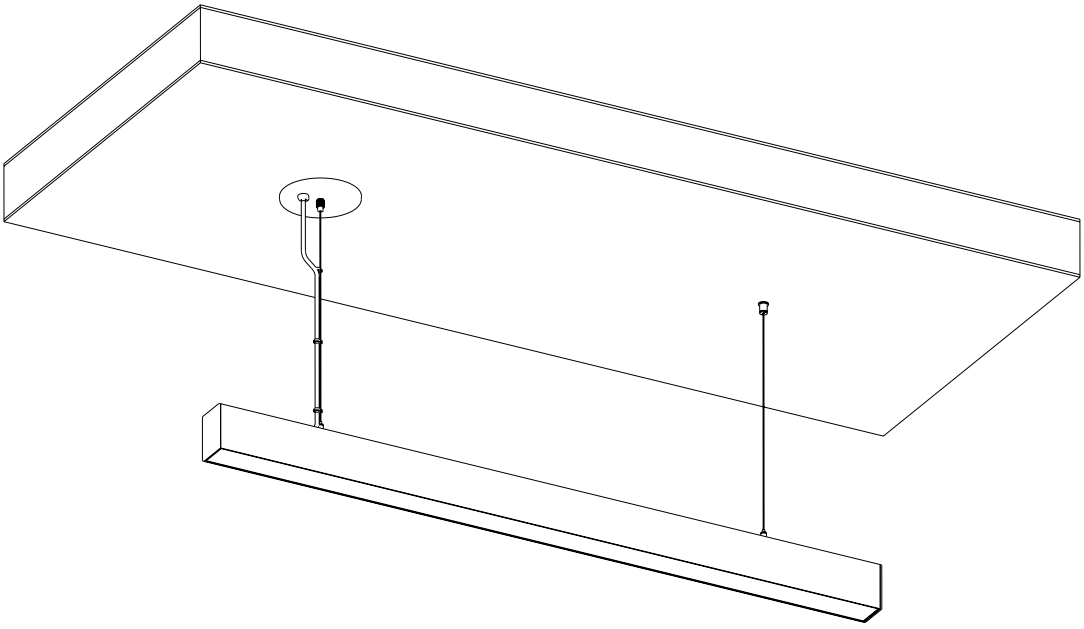

Joyolight reserves the rights change our products and specifications at anytime without prior notice and such modification shall be effective immediately. Contact Joyolight for the latest product information.

Five-year warranty

Contact us for complete terms and conditions.

JOYOLIGHT GROUP INC.

#12, 5200 Dixie road
Mississauga, ON, L4W 1E4

www.joyolight.ca
sales@joyolight.com
1-877-849-1942
647-496-8107