
JOYOLIGHt

LS5570/7380

INSTALLATION GUIDE

SUSPENSION
(Downlight ONLY)

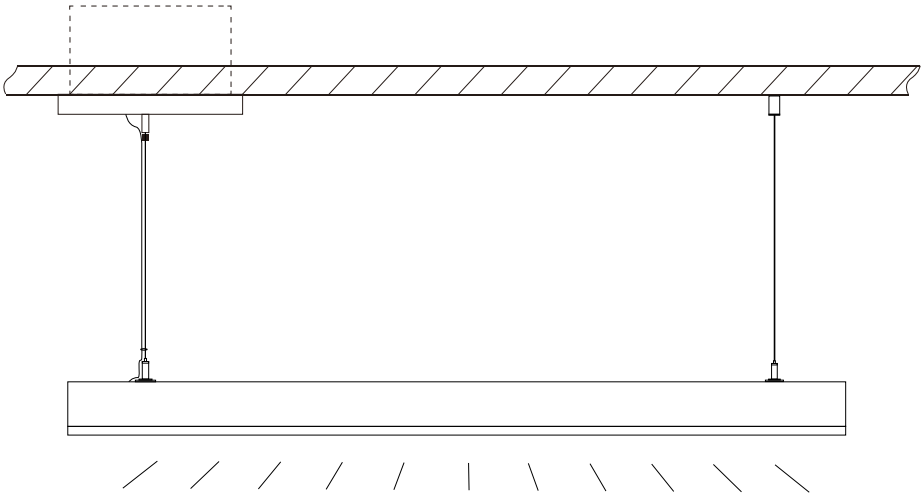

PLEASE READ THESE INSTRUCTIONS CAREFULY BEFORE INSTALLATION

#12, 5200 Dixie Rd.,
Mississauga, ON
L4W 1E4 CANADA
www.joyolight.ca
info@joyolight.com

WARNING

FAILURE TO FOLLOW THE INSTALLATION INSTRUCTIONS BELOW MAY RESULT IN SERIOUS INJURY OR DEATH.

- This product must be installed and serviced by a qualified electrician. Keep the 110 V power wiring separate from the dimming and control wiring.
- Disconnect power before installation, maintenance, or servicing to reduce the risk of electrical shock.
- Do not operate the fixture at a voltage exceeding its specified rating. The power cable must not support the weight of the fixture.
- Ensure that the cable remains free from mechanical tension and has sufficient slack.
- Do not install or use any fixture, component, or connector that is damaged.

CAUTION

- If the product is received with missing or damaged components, please contact Joyolight at 647-496-8107 (Canada).
- If the fixture does not operate properly, switch off the power immediately and contact Joyolight Technical Support for assistance.
- Handle the fixture carefully throughout installation to prevent damage.
- Always wear clean latex or cotton gloves when handling the fixture to prevent fingerprints, stains, or surface marks.
- Unauthorized field modifications or repairs will void the product warranty.

Joyolight reserves the rights change our products and specifications at anytime without prior notice and such modification shall be effective immediately.
Contact Joyolight for the latest product information.


Five-year warranty
Contact us for complete terms and conditions.

JOYOLIGHT GROUP INC.
#12, 5200 Dixie Rd.
Mississauga, ON, L4W 1E4


www.joyolight.ca
info@joyolight.com
1-877-849-1942 (US)
647-496-8107 (CA)

Suspension System

DOWNLIGHT ONLY

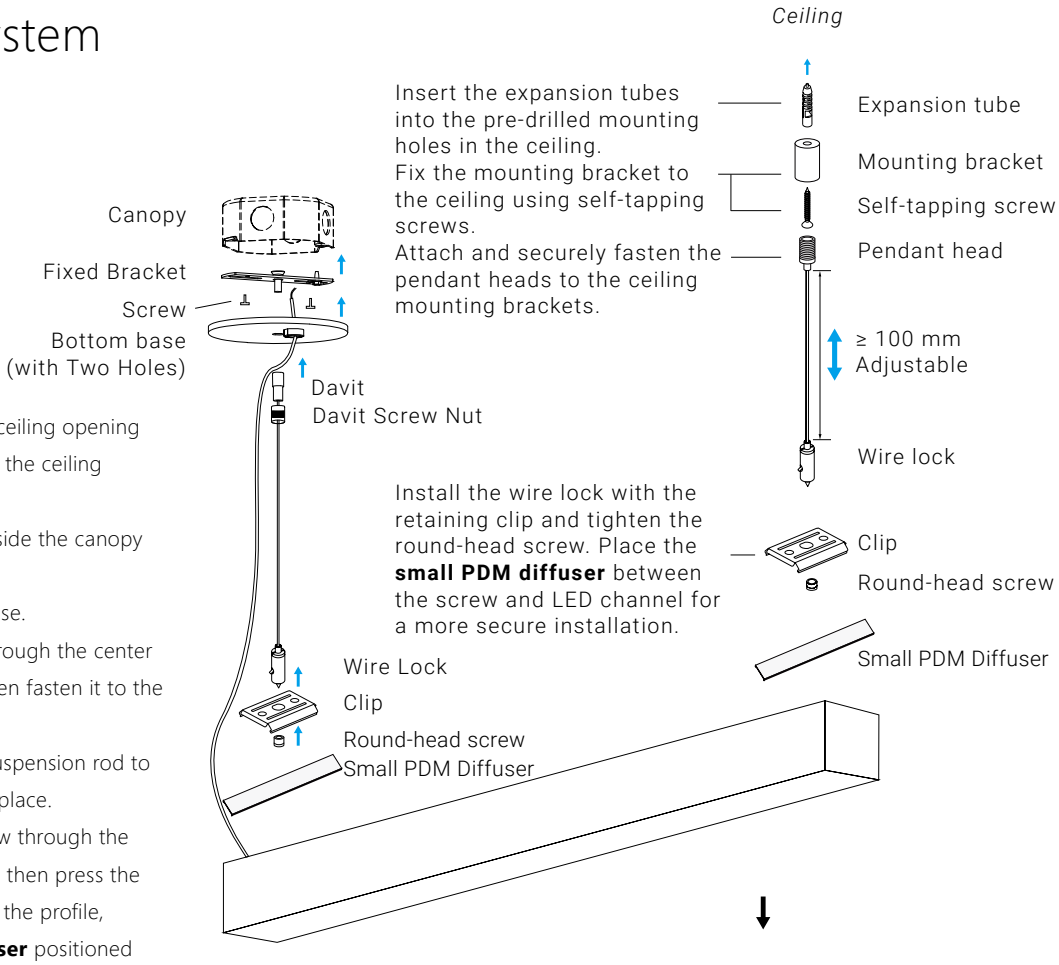


1. Install the canopy into the ceiling opening and ensure it sits flush with the ceiling surface.
2. Secure the fixed bracket inside the canopy using screws.
3. Install the bottom cover/base.
4. Pass the suspension rod through the center hole of the bottombase, then fasten it to the bolt on the fixed bracket.
5. Tighten the nut onto the suspension rod to secure the bottom base in place.
6. Insert the round-head screw through the clip to secure the wire lock, then press the clip firmly onto the back of the profile, with the **small PDM diffuser** positioned between the clip and the profile. The PDM diffuser increases friction and improves the grip, ensuring a more secure fit between the clip and the fixture body.

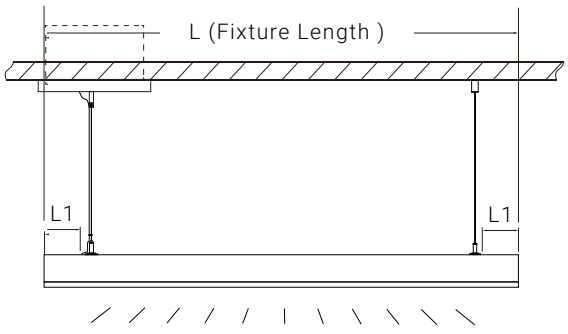


Fixture	L1
3′ ≤ L ≤ 4′	**120 mm ± 10 mm**
4′ < L ≤ 8′	**250 mm ± 10 mm**

Accessory



PLS-SW01

Suspension Wire Set
+ Small PDM Diffuser



PLS-SCW-H01

Suspension Canopy & Wire Set
with Wiring Hole
+ Small PDM Diffuser

JOYOLIGHt

Joyolight reserves the rights change our products and specifications at anytime without prior notice and such modification shall be effective immediately.
Contact Joyolight for the latest product information.

Five-year warranty
Contact us for complete terms and conditions.

JOYOLIGHT GROUP INC.
#12, 5200 Dixie Rd.
Mississauga, ON, L4W 1E4

www.joyolight.ca
info@joyolight.com
1-877-849-1942 (US)
647-496-8107 (CA)